
Autosol
Roadster 20W/50
5 Litre

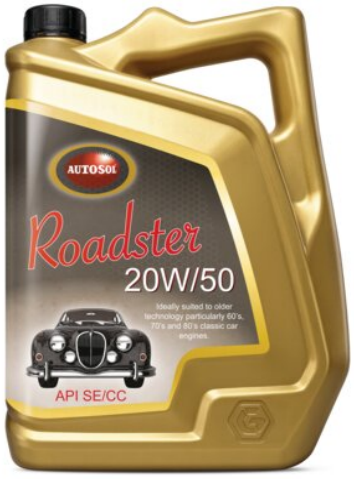

* Image for illustrative purposes only.

SIZE	PART NO	BARCODE
5 Litre	0392	5020618003922

PRODUCT DESCRIPTION

Autosol Roadster 20W/50 is a conventional multigrade engine oil designed to preserve and protect classic engines. Specially blended using high quality mineral oils and selected additives making it ideally suited to older technology, particularly 60's, 70's and 80's classic car engines.

RECOMMENDED FOR USE BY AUTOSOL FOR THE FOLLOWING MANUFACTURER'S SPECIFICATIONS

API: SE/CC

PRODUCT BENEFITS

* Ideally suited to classic engines
* Ensures lubricant performance
* Excellent high & low temperature performance

PRODUCT USAGE

For engines where this specification lubricant is required.

DIRECTIONS FOR USE

As recommended by the engine manufacturer.

STORAGE INSTRUCTIONS

Keep sealed in a cool, dry place.

SHELF LIFE

5 years from date of manufacture.

Appearance	:	Amber liquid
Odour	:	Characteristic
Solubility	:	Insoluble in water
Flammability	:	>200°C

HIGH PERFORMANCE
PREMIUM QUALITY

AUTOMOTIVE LUBRICANTS • QUALITY CHEMICALS • PREMIER BRANDS

Granville Oil & Chemicals Ltd.
29 Goldthorpe Ind. Est., Goldthorpe, Rotherham S63 9BL ENGLAND
Tel: +44 (0)1709 890099 • Web: www.granvilleoil.com

Autosol

Roadster 20W/50

5 Litre

Test	Method	Unit	Min.	Max.	Typical
Viscosity, Kinematic 100°c	ASTM D445	mm^2/s	16.3	<21.9	19.66
Viscosity, CCS -15°c	ASTM D4684	mPa.s		9500	
HTHS Viscosity	ASTM D4683	mPa.s	3.7		
Viscosity, Kinematic 40°c	ASTM D445	mm^2/s			181.7
Density	ASTM D792	@ 15°c			0.882
Total Base Number	ASTM D2896	mg KOH/g			7.98

SAFETY PRECAUTIONS

Please see our latest EC Safety Data Sheets for details.

TRANSPORT CLASSIFICATION

Please see our latest EC Safety Data Sheets for details.

AUTOMOTIVE LUBRICANTS • QUALITY CHEMICALS • PREMIER BRANDS



Granville Oil & Chemicals Ltd.
29 Goldthorpe Ind. Est., Goldthorpe, Rotherham S63 9BL ENGLAND
Tel: +44 (0)1709 890099 • Web: www.granvilleoil.com