

# Granville Silicone Grease


70g Tube

## PRODUCT DESCRIPTION

Granville Silicone Grease is compounded from dimethyl polysiloxane fluid, the product has a broad temperature range and is chemically inert, being resistant to water (hot, cold, steam & brine), lubricating oils, most hydrocarbons & solvents, natural gas, refinery gases and many acidic solutions.

## PRODUCT USAGE

Granville Silicone Grease has been designed for the lubrication of cylinder slides, taps, valves & stopcocks (where the presence of chemicals & solvents mean that conventional products can not be used). The product is suitable for use as a damping compound - both under conditions of high pressure and elevated temperature. Excellent dielectric properties of the grease means the product can be used with high voltage electrical systems for lubricating non-conducting contacts, prevents corona discharge and for preventing flashover on high voltage anodes.

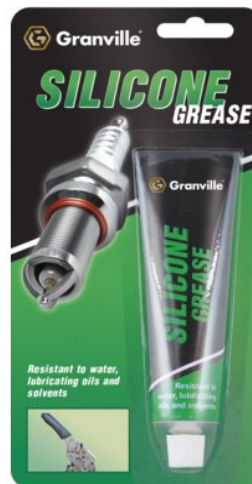

\* Image for illustrative purposes only.

SIZE	PART NO	BARCODE
70g Tube	0073	5020618000730

## STORAGE INSTRUCTIONS

Store sealed in a cool, dry place.

## SHELF LIFE

3 years from date of manufacture.

## SPECIFICATION INFORMATION

Operating temperature: -40°C to +200°C

NLGI classification: 2

Dielectric strength: 20Kv/mm (approx)

**Appearance** : Smooth white semi-translucent gel





# Granville

## Silicone Grease

70g Tube

**Odour** : Characteristic  
**Solubility** : Insoluble in water

### SAFETY PRECAUTIONS

Please see our latest EC Safety Data Sheets for details.

### TRANSPORT CLASSIFICATION

Please see our latest EC Safety Data Sheets for details.

